

Your Local Representative


EMC Solutions

Newcastle, Galway City, Ireland


www.emc-solutions.com



Profile Selection Guide

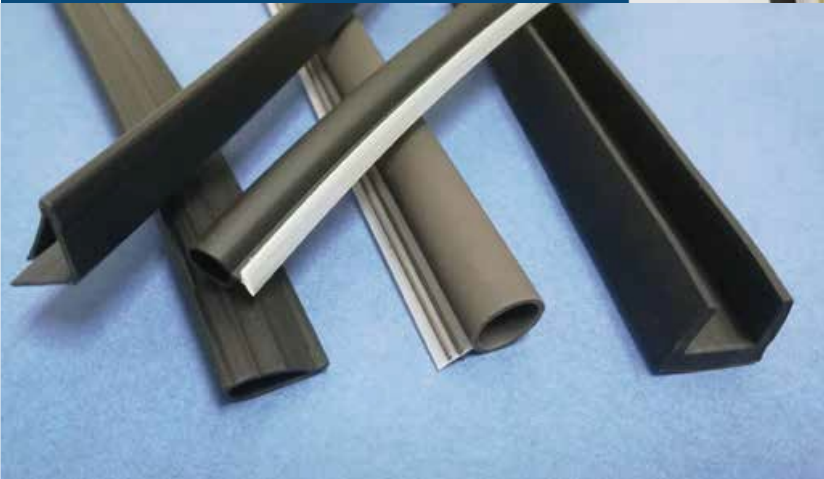

Windows / Doors / Vents

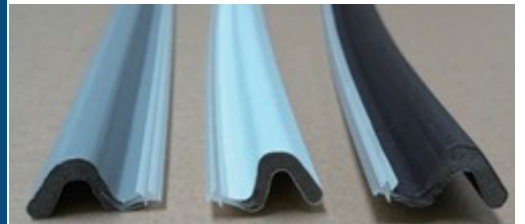

Commercial / Domestic / Bespoke

High-Quality Compression Sealing

Schlegel PolyFab® is a premier line of foam, PP, TPE, and dual-extrusion gaskets. From custom windows and doors to office cubicles and other building and product projects, PolyFab® sealing products provide consistent quality that is unsurpassed in the industry.

Schlegel EMI brings 40 years of expertise in sealing gaskets to the construction industry with the PolyFab® line.

All parts shipped from Schlegel EMI are RoHS and REACH compliant.

PolyFab® Properties



Highly engineered embossed polyethylene liner

- Resists paints and varnishes
- Long lasting
- Maintains an attractive appearance



UV stabilized

- Stable in sunlight (UV stable)
- Tested up to 5,000 Kj/m² with no visible degradation



Resilient urethane open-celled foam


- Shape and resiliency are retained over time
- Offers excellent all temperature sealing performance
- No corner leaks
- Seal conforms to uneven surfaces



Dual durometer insert

- Allows for easy insertion and maximum retention
- It is removable without damaging jamb or seal

Part Number Guide (Foam Gaskets)

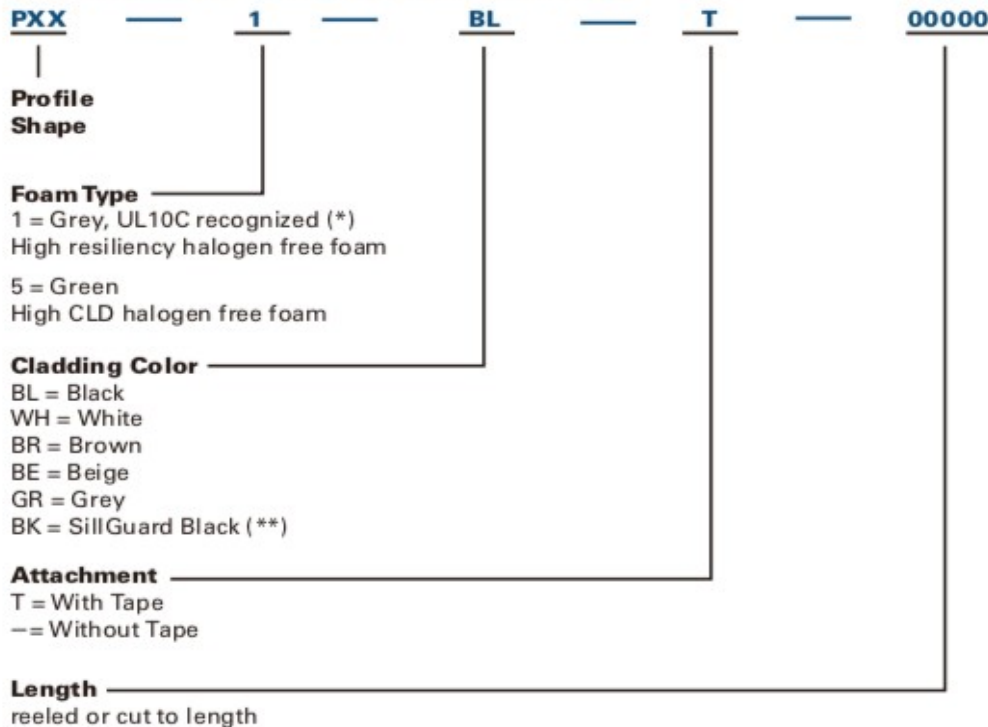







(*) UL10C, Standard for positive pressure fire tests of door assemblies.
 (**) SillGuard Black (Fine Satin Embossed):
 Hydrostatic Resistance: 115psi. Flame Resistance, after flame: (sec) ≤ 2.0

Local representative EMC Solutions Ireland





















www.emc-solutions.com

Liner

















Black (BL)	White (WH)	Brown (BR)	Beige (BE)	Grey (GR)	Sill Guard Black (BK)
					

Tensile Strength (psi)	3450
Compression Set	<15% (compressed at 50% during 22 Hrs. @ 70°C)
Heat Conductivity W/mK	0.06 at 0°C
Operating Temperature	-60 to 70°C

Profiles (Foam Gaskets)

P4U*	P66	P4X	P4E*	P4F*
				
2.54mm x 6.6mm .100" x .260"	6.35mm x 9.53mm .250" x .375"	6.4mm x 8.3mm .252" x .327"	6.6mm x 6.6mm .260" x .260"	8.5mm x 8.5mm .335" x .335"
P63	P68	P90*	P10	P4P*
				
9.53mm x 9.53mm .375" x .375"	9.53mm x 12.7mm .375" x .500"	3.56mm x 6.35mm .140" x .250"	6.35mm x 9.53mm .250" x .375"	3.8mm x 4.8mm .150" x .189"
P41*	P4T*	P4S*	PQ2*	P4R*
				
5.08mm x 4.83mm .200" x .190"	5.1mm x 6.9mm .201" x .272"	5.7mm x 4.8mm .224" x .189"	6.35mm x 4.83mm .250" x .190"	6.4mm x 6.9mm .252" x .272"
P5K	P5N	P53	P4Q	P3W
				
7.0mm x 6.9mm .276" x .272"	7.6mm x 4.8mm .300" x .189"	7.62mm x 6.86mm .300" x .270"	9.53mm x 4.83mm .375" x .190"	9.53mm x 6.86mm .375" x .270"






Profiles (Foam Gaskets)

PH3*  8.0mm x 8.0mm .315" x .315"	P4V  8.79mm x 11.3mm .346" x .445"	P98*  9.78mm x 10.67mm .385" x .420"	P85  11.8mm x 10.7mm .465" x .421"	P4C*  12.42mm x 15.06mm .489" x .593"
P4M  16.5mm x 14.7mm .650" x .579"	P4W  16.51mm x 14.73mm .650" x .580"	P32  17.15mm x 14.73mm .675" x .580"	P3X*  18.79mm x 15.62mm .740" x .615"	P5A*  19.5mm x 16.6mm .768" x .654"
P4N  20.9mm x 14.7mm .823" x .579"	P3Y*  23.52mm x 15.77mm .926" x .621"	P60  3.3mm x 13.2mm .130" x .520"	P4Y  9.68mm x 24.0mm .381" x .945"	P5J  5.5mm x 33.4mm .217" x 1.315"
P5B				
 5.54mm x 42.9mm .218" x 1.689"				

Part Number Guide (Thermoplastic Elastomer "TPE" Gaskets)

PTXX — **BL** — **T** — **00000**
 | | | |
 Profile Color Tape Length
 Shape

Profiles (Thermoplastic Elastomer "TPE" Gaskets)

PT01  9.42mm x 6.35mm .371" x .250"	PT02  14.29mm x 9.53mm .562" x .375"	PT03  12.7mm x 14.3mm .500" x .563"	PT04  5.8mm x 13.5mm .228" x .531"	PT05  11.1mm x 12.5mm .437" x .492"
--	---	--	--	--

Your Local Representative EMC Solutions Ireland
www.emc-solutions.com


Applications



Window Weatherstripping



Door Installation

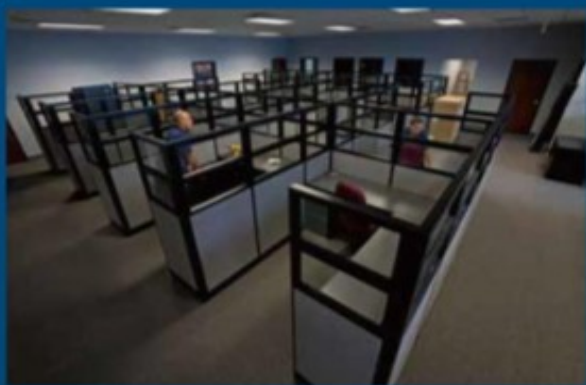

Workplace Infrastructure



Construction Screen Installation

Local representative EMC Solutions Ireland

www.emc-solutions.com

EMC Solutions
Newcastle,
Galway City,
Ireland



Your Local Representative for the Republic of Ireland and Northern Ireland

NORTH AMERICA

Schlegel Electronic Materials, Inc.

1600 Lexington Ave
Suite 236A Rochester NY 14606
Tel No: +1 585-643 2000
Fax No: +1 585-427 7216
Email: schlegelemi.na@schlegelemi.com

EUROPE

Schlegel Electronic Materials, bv

Slijpesteenweg 28
8432 Middelkerke (Leffinge)
Belgium
Tel No: +32 59 560 270
Fax No: +32 59 560 271
Email: schlegelbe@schlegelemi.com

ASIA

Schlegel Electronic Materials Asia Limited

Unit 3, 3/F., Block A, New Trade Plaza,
6 On Ping Street, Shatin, N.T., Hong Kong
Tel No: +852-2686 9872
Fax No: +852-2686 9728
Email: schlegelemi@emeigroup.com

Schlegel (Dongguan) Electronics Limited

No. 8 Qiaoxin Road, Qiaotou, Dongguan,
Guangdong, China
Postal Code: 523525
Tel No: +86-769-8356 5686
Fax No: +86-769-8334 5656
Email: schlegelemi@emeigroup.com

Schlegel (Shanghai) Electronics Limited

4/F., 79 Parts, 111 Meisheng Road,
F.T.Z., Pudong, Shanghai, China
Postal Code: 200131
Tel No: +86-21-5868 3383
Fax No: +86-21-5868 3386
Email: schlegelemi@emeigroup.com

Taiwan Schlegel Electronics Limited

No. 99, Alley 3, Lane 182, Section 2 Wenhua Road,
Banqiao District
Postal Code: 22044
Tel No: +886-2-8258 5148
Fax No: +886-2-8258 5149
Email: schlegelemi@emeigroup.com

Contact: Michael Moore

Tel: 00353 862535199

Email: michael.moore@emc-solutions.com

Website: <https://www.emc-solutions.com>

Schlegel PolyFab®
Passion For Quality

