


EMC Solutions Sectors

Sound and Vibration Control

PSN 140
Product data sheet

Ref: PLA 1460

AcuLite® E20F



Generic Description

A high performance light weight flexible material engineered to give excellent broad band sound absorption

Function

Airborne noise reduction and control, typically used :

- Behind automotive trim
- Above automotive headliners
- Within automotive instrument panels
- As a lining within acoustic enclosures

Component Detail

Machine cut finished parts, with optional edge sealing and optional self-adhesive systems

Material Properties

• Acoustic performance

The chart below shows typical acoustic absorption performance in a large scale test. The test is performed on the material from which a finished component is manufactured.

• Physical characteristics

Density : 275gsm

Nominal uncompressed thickness : 10mm

Polymer blend : 18%PP, 73%PET, 9%PU-R

• Flammability : ISO 3795 0mm/min

Features

- Dimensionally stable
- Can be ultrasonically welded to substrates
- Can be supplied with clips for mechanical attachment
- Virtually no dusting after processing.
- Wide range of self-adhesives available

• Colour

White core fibre. White facing textile.

• Service Temperature

Continuous : 100deg C



Peak (short duration) : 120deg C

• OEM usage

AcuLite is currently approved and used in Europe by Nissan, Honda, Toyota, Mini, Ford, Jaguar, Land Rover, Mercedes, Aston-Martin, Renault, PSA, McLaren Automotive

Self Adhesive Availability

- SBR / Solvented Acrylic / Water based Acrylic compounds
- Scrim supported / Film supported / Transfer adhesive presentations
- Striped or solid coverage
- Silicone paper or plastic film release liners
- Ultra-low VOC emission adhesive technology available

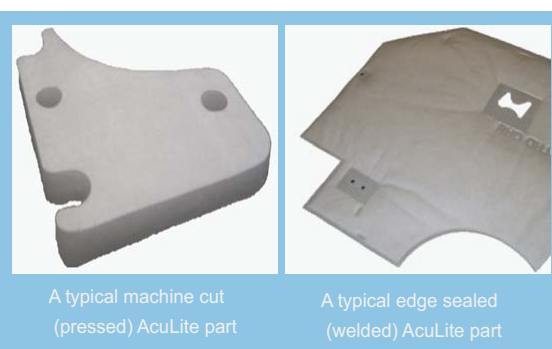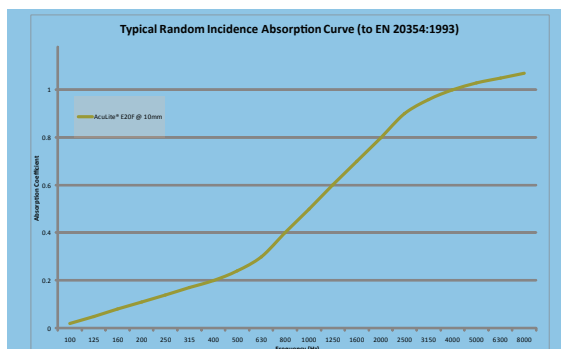

Authorised

Issue

2

Date

19-12-12



EMC Solutions

EMC Solutions Contact US